




MH-18670 Specification

NiMH Cylindrical Battery

IEC: KR18/67

Typical Characteristics

Model: MH-18670		
Specifications		
Nominal Voltage (V)		
1.2V		
Capacity*	Typical (mAh)	4500
	Minimum (mAh)	4500
Dimension	Diameter (mm)	18.5 ⁺⁰ _{-0.7}
	Height (mm)	67.5 ⁺⁰ _{-1.0}
Charging**	Standard	45mA x 16 hrs
	Rapid	2250mA x 2.1 hrs △ - V = 5mV
Operating Temperature (°C)	Standard Charging	0 ~ 40°C
	Rapid Charging	0 ~ 40°C
	Discharging	-20 ~ 50°C
	Storage	-20 ~ 30°C
Service Life	>500 cycles (IEC standard)	
Internal Resistance	25mΩ (after fully charged)	
Weight	Approx. 62.7 g	
Cuff-off Voltage (V)	1.00	

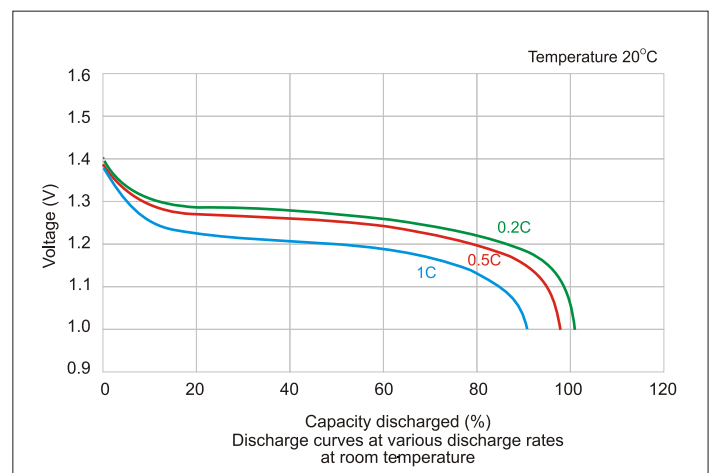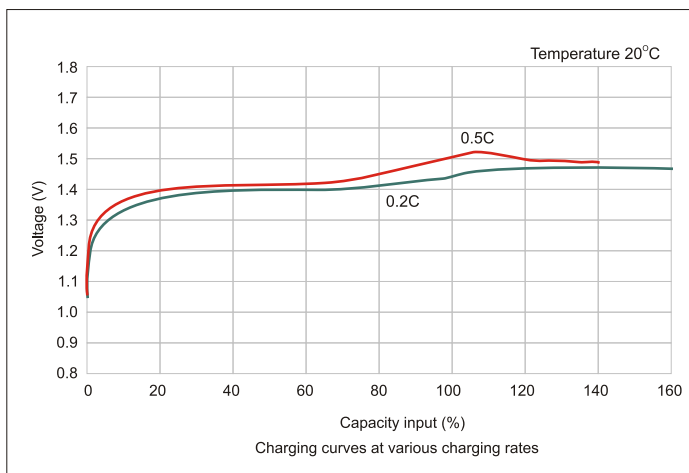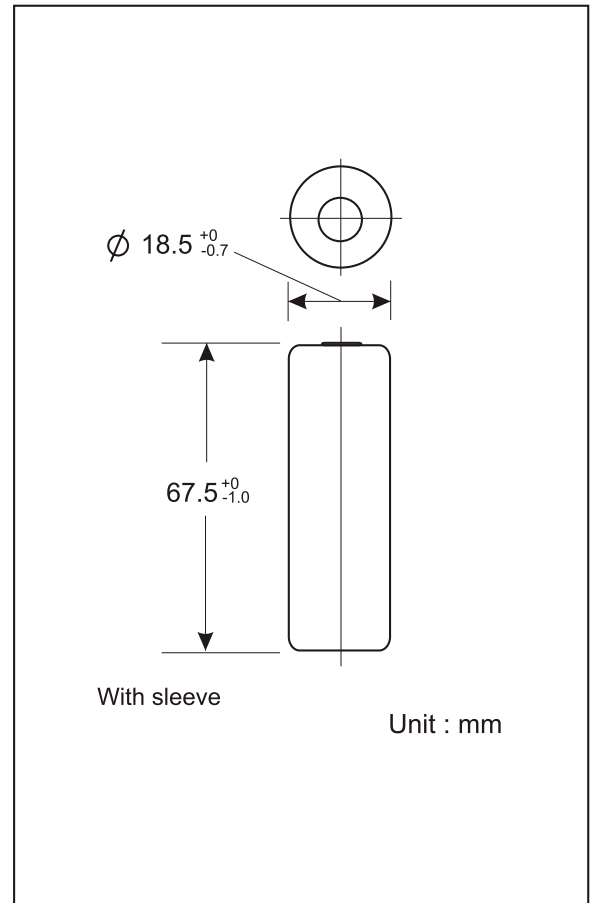

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.